


FAN FIXER / FF-25F-43-TPE-VO

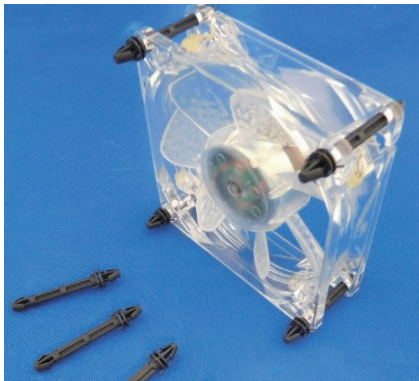


Plug-in-mount, vibration damping fan fixture

- Screw-less fixing helps to improve work efficiency and reduce number of components
- The vibration damping material reduces fan chattering and lowers the noise.
- Excellent non-flammability (UL94 VO recognized materials are used.)

Specifications


Item	Unit	FF-25F-43-TPE-VO
Material	—	Thermoplastic elastomer
Fan thickness	mm	t25±0.5
Fan hole dia.	mm	φ4.3±0.2
Weight	g/pcs	70
Panel thickness	mm	t0.8~1.2
Mounting hole dia.	mm	φ4.3±0.1
Recommended operating temperature	℃	-20~70
Flammability	—	UL94 VO recognized materials are used

Properties

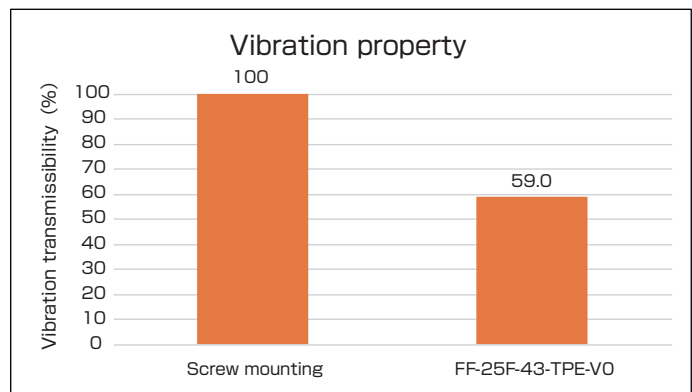

<Testing conditions>
 Fan dimensions : □60mm, t25mm
 Fan weight : 52g
 Fan rotation speed : Approx.4500rpm
 Tested frequency : 1~1000Hz

● Evaluation test setup

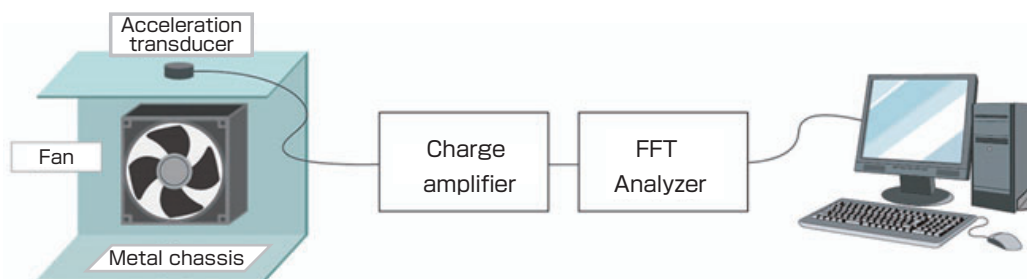

- The specifications are for reference only, and not a guarantee. Information may change without notice.
- Any reprinting or copying of content in this document is prohibited without our prior consent.